



# MORONI Ceiling Light

MLCF02ANTBRS Antique Brass

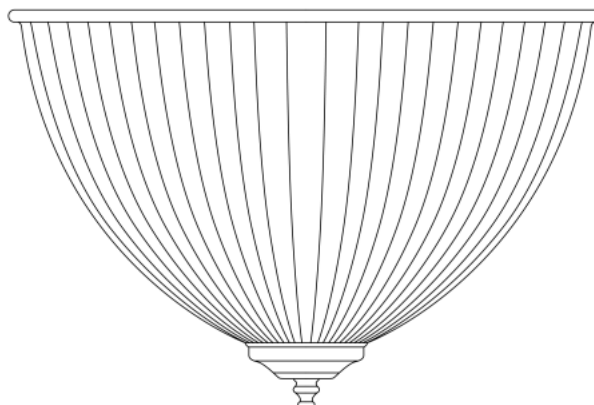

<b>MATERIAL</b>	Brass   Glass
<b>HEIGHT</b>	20cm   7.87"
<b>WIDTH   DIAMETER</b>	30cm   11.81"
<b>LENGTH   PROJECTION</b>	n/a
<b>WEIGHT</b>	1.82KG   4.01lbs
<b>LAMPHOLDER</b>	E27 x 2
<b>MAX WATTAGE</b>	40W x 2
<b>VOLTAGE</b>	220/240v
<b>IP RATING</b>	20
<b>CLASS PROTECTION</b>	I
<b>SHADE</b>	GL025
<b>FLEX   BAR   CHAIN LENGTH</b>	n/a
<b>CABLE TYPE</b>	-

**Fixing Bracket** MLROSE11 | Antique Brass

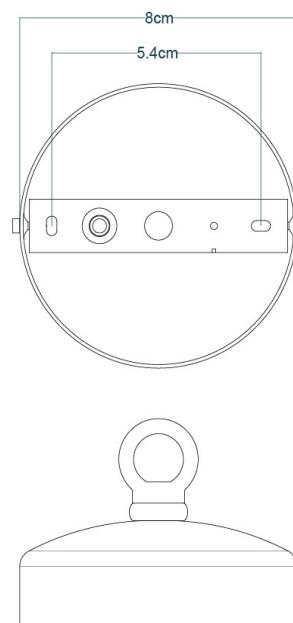


**Product Notes:**

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.


# MORONI Ceiling Light

MLCF02ANTSLV    Antique Silver

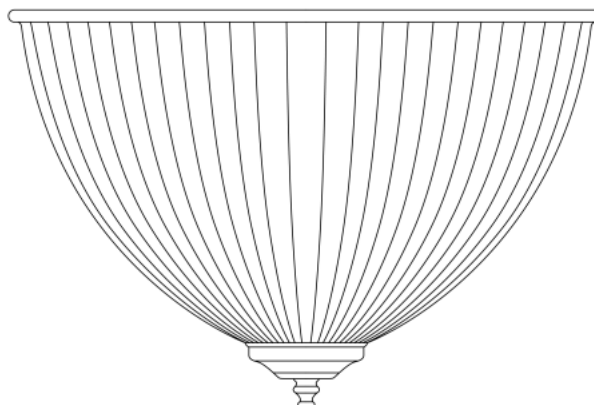

<b>MATERIAL</b>	Brass   Glass
<b>HEIGHT</b>	20cm   7.87"
<b>WIDTH   DIAMETER</b>	30cm   11.81"
<b>LENGTH   PROJECTION</b>	n/a
<b>WEIGHT</b>	1.82KG   4.01lbs
<b>LAMPHOLDER</b>	E27 x 2
<b>MAX WATTAGE</b>	40W x 2
<b>VOLTAGE</b>	220/240v
<b>IP RATING</b>	20
<b>CLASS PROTECTION</b>	I
<b>SHADE</b>	GL025
<b>FLEX   BAR   CHAIN LENGTH</b>	n/a
<b>CABLE TYPE</b>	-

**Fixing Bracket** MLROSE11 | Antique Silver

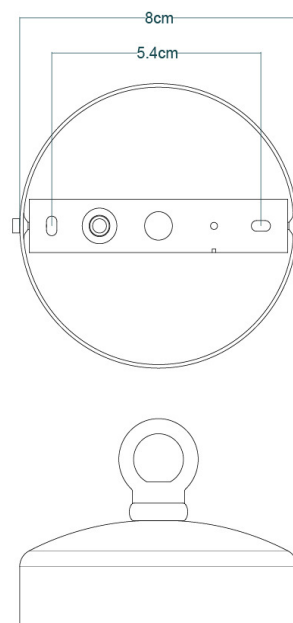


**Product Notes:**

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.


# MORONI Ceiling Light

MLCF02POLBRS Polished Brass

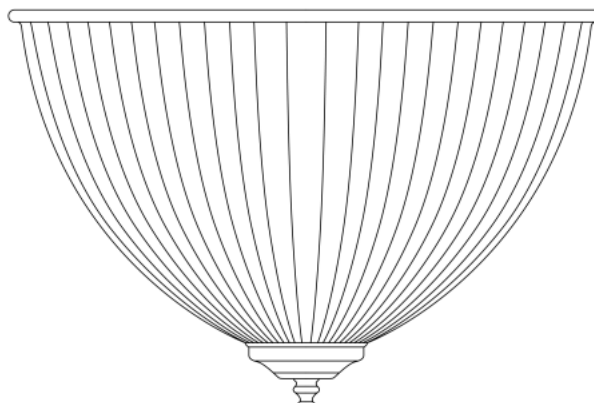

<b>MATERIAL</b>	Brass   Glass
<b>HEIGHT</b>	20cm   7.87"
<b>WIDTH   DIAMETER</b>	30cm   11.81"
<b>LENGTH   PROJECTION</b>	n/a
<b>WEIGHT</b>	1.82KG   4.01lbs
<b>LAMPHOLDER</b>	E27 x 2
<b>MAX WATTAGE</b>	40W x 2
<b>VOLTAGE</b>	220/240v
<b>IP RATING</b>	20
<b>CLASS PROTECTION</b>	I
<b>SHADE</b>	GL025
<b>FLEX   BAR   CHAIN LENGTH</b>	n/a
<b>CABLE TYPE</b>	-

**Fixing Bracket** MLROSE11 | Polished Brass

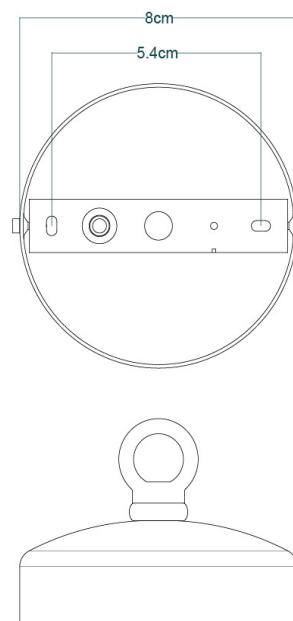


**Product Notes:**

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.


# MORONI Ceiling Light

MLCF02SATBRS Satin Brass

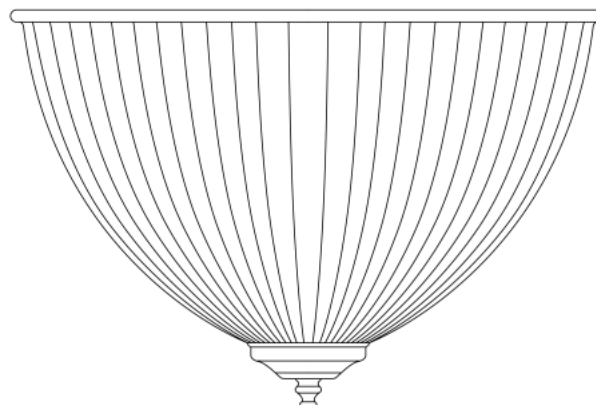

<b>MATERIAL</b>	Brass   Glass
<b>HEIGHT</b>	20cm   7.87"
<b>WIDTH   DIAMETER</b>	30cm   11.81"
<b>LENGTH   PROJECTION</b>	n/a
<b>WEIGHT</b>	1.82KG   4.01lbs
<b>LAMPHOLDER</b>	E27 x 2
<b>MAX WATTAGE</b>	40W x 2
<b>VOLTAGE</b>	220/240v
<b>IP RATING</b>	20
<b>CLASS PROTECTION</b>	I
<b>SHADE</b>	GL025
<b>FLEX   BAR   CHAIN LENGTH</b>	n/a
<b>CABLE TYPE</b>	-

**Fixing Bracket** MLROSE11 | Satin Brass

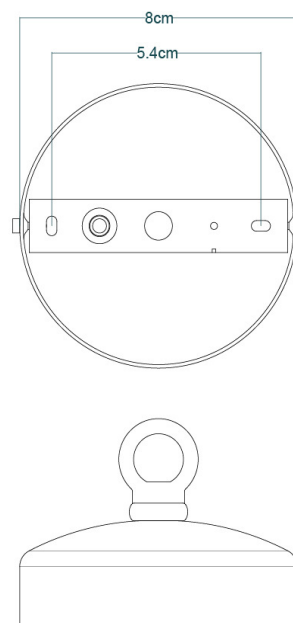

**Product Notes:**

1) Lamps not included with light fixture. 2) All products are individually hand crafted, therefore may differ slightly within manufacturing tolerances. 3) Please refer to: <http://www.mullanlighting.com/terms> for full list of Terms & Conditions. 4) Cable/Chain can be shortened during installation. 5) Longer Cable/Chain available on request. 6) Additional colour finishes available on request. 7.) Dimensions do not include lamps. 8.) Products wired to UL standards will operate at 110/120v with the appropriate lampholders.